


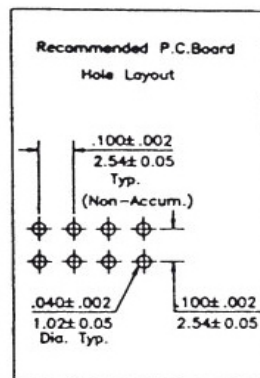
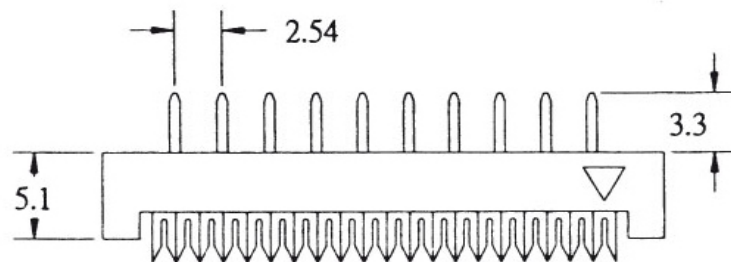


DIP Verbinder 2,54x2,54

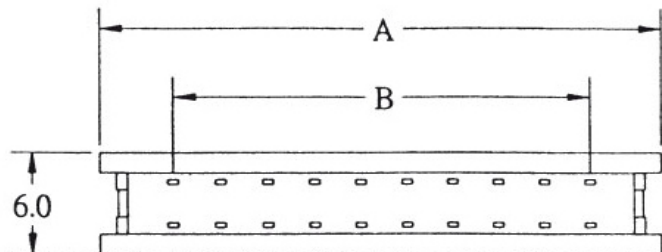

Spezifikationen

Kontaktwiderstand:	30mΩ max. bei 100mA DC
Isolatorwiderstand:	1000MΩ min. bei 500V DC
Nennstrom:	1A
Spannungsfestigkeit:	500V AC für 1 Minute
Arbeitstemperatur:	-55°C - +105°C
Kontakt:	Phosphorbronze
Gehäuse:	PBT & 30% Glasfaser (UL 94V-0)

Maße

Polzahl	A	B
8	15,38	7,63
10	18,04	10,16
12	20,64	12,7
14	23,18	15,24
16	25,73	17,78
20	30,7	22,86
24	35,68	27,94
26	38,43	30,48
28	40,74	33,02
30	43,54	35,56
34	48,45	40,64
40	56,04	48,26
50	69,08	60,96
60	81,6	73,66
64	86,4	78,74

Grösse des Flachbandkabels:
 Raster 1,27, AWG 28 (Litze) oder AWG 30(Draht)

Artikelnummer: SV-0002